



DESIGNED
IN EUROPE



Robust and compact

- **Double position:** Electronic display in two positions.
- **Security:** Blocked keyboard for avoiding function modifications.
- **Flash memory:** Keeps the last weighing on screen.
- **GLP-GMP:** Function date, hour and ticket number (optional RS232C).
- **USB Direct:** Data can be sent to PC without software (optional).
- **Double tare:** Normal and permanent.



► Adaptable

Stainless steel AISI 304 platforms and plates in Three sizes. Adaptable for any kind of applications.



► Designed to last

Created for an intensive use, protected against liquid and powdered products. The indicator surface, which is smooth and without edges, is very easy to clean.



► Display multi-position

Its Z3 indicator can be fixed to either side and can also be separated from the platform to place it in the most comfortable position, even on the wall, with its incorporated anchorage. It uses the minimum work space.



► DSF Technology

'Innovative' is the adjective for the DSF filter integrated into our Z3T, as it blocks any disturbance or vibration, meaning that the display shows the real weight at all times.

► 100% reliable

A cable directly connects the display to the platforms without an adapter, providing more reliability and durability.



► Printing of results

Optional connection to our printers. Our PR6 printer automatically cuts the paper. It prints three lines at the top and one at the bottom of the ticket, including our Z3 THS software for entering data from the PC.


Connects to our remote display with a cable or wireless.



► USB Direct, what you always wanted to have

Our cable connecting the Z3T scale to your PC or MAC shows the weighing data in any application or document you have installed.

No middleman software, no installation: simple and effective.



► Support table

We have designed these support tables to make installation simple. Made on steel with epoxy covering.

It has no lower base, making it easy to clean. Includes guides for fixing the base and preventing the platform from moving.

Height can be adapted from 52 to 84 cm. Wheels optional.






External dimensions (mm)

Z3T F0-6
Z3T F0-15
Z3T F0-30

Z3T F1-15
Z3T F1-30
Z3T F1-60
Z3T F1-150

Z3T F2-30
Z3T F2-60
Z3T F2-150

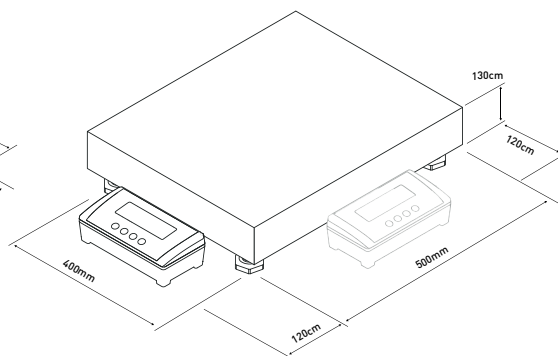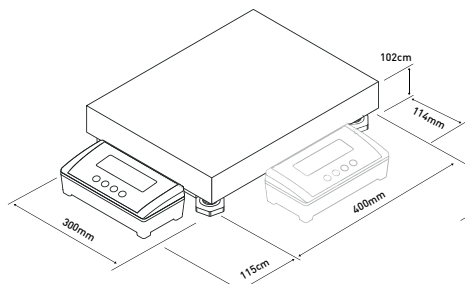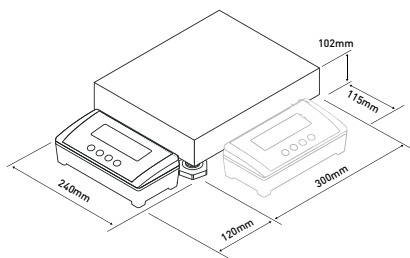

Model	Z3T F0-6	Z3T F0-15	Z3T F0-30	Z3T F1-15	Z3T F1-30	Z3T F1-60	Z3T F1-150	Z3T F2-30	Z3T F2-60	Z3T F2-150
Reference	70165	70166	70167	70168	70169	70170	70171	70172	70173	70174
Capacity	6 kg	15 kg	30 kg	15 kg	30 kg	60 kg	150 kg	30 kg	60 kg	150 kg
Readability	1 g	2 g	5 g	2 g	5 g	10 g	20 g	5 g	10 g	20 g
Weighing Units	g, kg									
Display	LCD / Five digits 25 mm (height of digits)									
Acoustic Warning	Yes									
Connectivity	RS 232-C, wireless (optional)									
Speed Transmission	9.600 / 19.200 / 38.400 / 57.600 bauds									
Number of Bits and Inequality	8 bits, inequality, 1 bit stop									
Supply	230 V adapter / 50 Hz (euro) 7.5 V 1A									
Battery	6V-1.2Ah - 30 / 60 hours operation time									
Working Temperature	+5°C / +35°C									
External Dim Platform (mm)	300 x 240 x 102			400 x 300 x 102			500 x 400 x 122			
External Dim Pos. 1 (mm)	420 x 240 x 102			515 x 300 x 102			620 x 400 x 122			
External Dim Pos. 2 (mm)	300 x 355 x 102			400 x 414 x 102			500 x 520 x 122			
Net Weight Total (kg)	5,5			6,5			8,5			
Dim. Packaging (mm)	540 x 330 x 130			600 x 390 x 130			750 x 490 x 150			
Total Weight with Packaging (kg)	6,5			8			10			
MSRP (€)	---			---			---			

Ref.	Accessories	MSRP (€)
70322	Support table for F1 platform	---
70323	Support table for F2 platform	---
60968	Wheel set for platform or table	---
5263	Repeater indicator RD3 (RS-232)	---
70034	PR4 printer (RS-232)	---
4877	Virtual key software for PC	---
36786	USB Direct Z cable	---
36785	RS-232 cable to RD3 or PC Z, 1.5 m	---
3774	RS-232 cable to RD3 or PC Z, 4 m	---
36784	RS-232 cable for printer Z	---

Ref.	Options	MSRP (€)
8023	ISOCAL certificate from 0,01 g to 30 kg	---
8024	ISOCAL certificate from 31 kg to 300 kg	---
3777	RS-232 output	---
3775	Wireless Z connection	---

More information

Product Data:

Quick Guide:

User's manual:


<http://gram-group.com/product/gram-z3t/>
http://gram-group.com/wp-content/uploads/2017/02/GR_Z3T_ENG.pdf
http://gram-group.com/wp-content/uploads/2016/12/MANUAL_Z3_2016_ENG_001.pdf